

RP- MCR116 | RP- RPS150 16-Slot Media Converter Rack

The RP-MCR116 is a specially designed chassis to accommodate 110TMC/1000SC/1200C series slide-in converters. A chassis hosts up to 16 pieces of various media converters which can be used standalone or slide into the chassis. All the converters connected directly to the chassis's power backplane with a built-in universal power supply, the power adapters are no longer required when managing multiple converters together.




Feature

- Provides housing for up to 16 media converters
- Front panel LED indications
- Standard 19" rack-mount size, 2U height
- Hot swappable, easy & quick replacement of converters and power supplies
- Provides two cooling fans to ensure good ventilation
- Two redundant power supplies with load-sharing to ensure non-stop reliable operation
- Power isolation design with converter bays: ensures each bay is electrically isolated from each other

Specification

Slots Number	• 16 slots for slide-in converter
LED Indicator	• 2 * Power on, 2 * Power fail, 2 * Fan Fail
Power Supply	<ul style="list-style-type: none"> • One hot-swappable power supply; optional second power supply for load-sharing, hot-swappable • Input: AC 90 ~ 260VAC/47~63Hz
Power Overload Protection	• All outputs protected from short circuit condition, automatic recovery
Cooling	• Two fans mounted at the rear)
Power Output	• Per Slot: DC7.5V/1A
Environment	<ul style="list-style-type: none"> • Operating Temperature: 0°C~45°C • Operating Humidity: 10%~90% (Non-Condensing)
Dimension	• 440 * 88 * 390 mm (including power supply unit)
Certification	• FCC, CE

Application

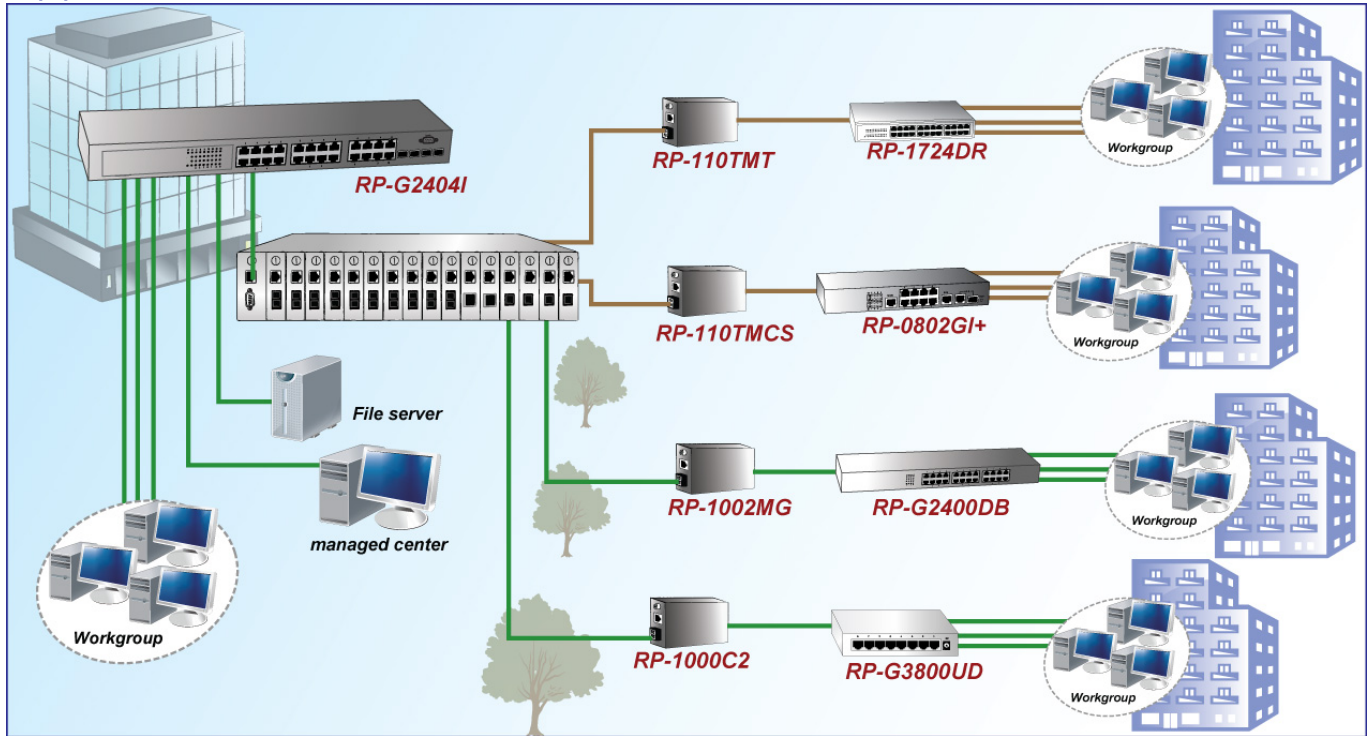

Ordering information

RP-MCR116 16-Slot Media Converter Rack, w/ 1 AC Power Supply

Optional Power Supply:

RP-RPS150 90-260V/150W AC Redundant Power Supply

REPOTEC CO., LTD.

3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan

TEL: 886-2-8227-1888 FAX: 886-2-8227-1818